









EVOGLOSS CONTENTS

EVOGLOSS CONTENTS

EVOGLOSS PANEL SIZES

EVOGLOSS TECHNICIAL FEATURES



EVOGLOSS DECOR

EVOGLOSS PANEL SIZES



EVOGLOSS PANEL SIZES

EVOGLOSS panels are obtained by coating the surface of high quality MDF panels with pvc and/or pet foils having more than a hundred glossy and matte decor options. Evogloss panel options offer you the opportunity to create unique, modern and aesthetic living spaces.



EVOGLOSS MATT - HIGH GLOSS PANEL

EVOGLOSS **MATT - HIGH GLOSS** PANEL

EVOGLOSS HIGH GLOSS PANEL MDF

EVOGLOSS MATT PANEL MDF



EVOGLOSS TECHNICAL FEATURES

THE FRONT SURFACE OF THE PANELS IS COVERED WITH EVOGLOSS PVC OR PET AND THE BACK SIDE IS COVERED WITH WHITE IMPREGNATED PAPER OR LINING.


MATERIAL	PVC	PET
UV-RESISTANCE	NORMAL	GOOD
SURFACE QUALITY	NORMAL	VERY GOOD
RESISTANCE TO SCRATCHING	NORMAL	NORMAL
ENVIRONMENT FRIENDLY	FLOW PROMOTERS, STABILIZATORS	NO ADDITIVES
DEPTH OF COLORS	LIGHT	DARK
CLEANNESS OF PATTERNS	NORMAL	CLEAN PATTERNS

Evogloss PET and PVC are surface materials with a UV resistance rating of Gray Scale 4/5 or higher according to the standards of EN 15187 Furniture - Light Exposure Effect Evaluation standards, which have a low-carbon structure with formaldehyde, cadmium, lead-based stabilizers and carcinogens determined by the international REACH organization.

* When PET burns, only water and carbon dioxide are released.



EVOGLOSS TECHNICAL FEATURES

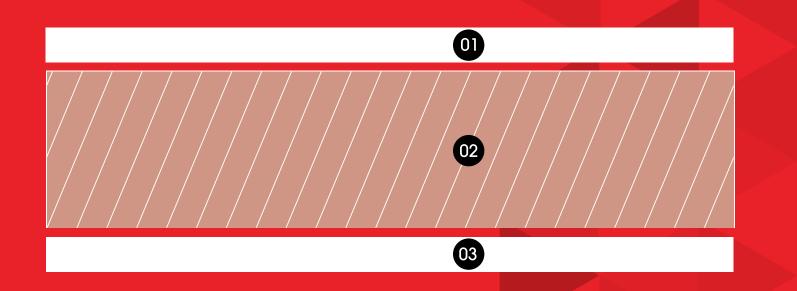

PANEL FEATURES

BOARD TYPE	MDF	
PANEL THICKNESS*	8 mm-18 mm	
PANEL SIZES	1220 x 2800 mm	
FOLIO THICKNESS	0,2 mm - 0,25 mm - 0,3 mm - 0,4 mm	
FOLIO TYPE	PVC and/or PET	

*Production in different sizes within the range requires a certain order quantity.

EVOGLOSS PANEL FEATURES

 $\mathbf{01}$

PET - PVC COATING

High-grade, scratch- and fade-resistant decorative coating

02 MDF

Strong board with high pressure resistance that fits for E1 norms

03 **IMPREGNATED PAPER**

Impregnated decorative paper

EVOGLOSS TECHNICAL FEATURES

	TEST	UNIT OR FEATURE		THICKNESS RANGE (RATED)	
	METHOD			t<15	15≤t≤20
THICKNESS COMPARED TO RATED VALUES THICKNESS T WITHIN THE BOARD	EN 14323	m	ım	+0,5/-0,3 $t^{max} - t^{min} \le 0,6$	
LENGTH AND WIDTH	EN 14323	mm		± 5	
FLATNESS	EN 14323	mm/m		-	≤2
DENSITY	EN 323		%		±7
SURFACE DEFFECTS	EN 14323	m²		4 pieces in 1 m ² between 0-2,5 mm 3 pieces in 1 m ² between 2,5 - 6mm 2 pieces in 1 m ² between 6-10 mm 1 piece in 1 m ² between 10-15 mm	
SURFACE RESISTANCE TO MICRO-SCRATCH	CEN/TS 16611 (Method A)	% change		≤ 10	
RESISTANCE TO SCRATCHING	EN 15186 Method B	Ν		≥ 0,5	
SURFACE RESISTANCE TO DRY TEMPERATURE (70°)	EN 12722	Rating		5	
LIGHT FASTNESS (XENON ARC LAMP)	EN 15187	Scale		Grey scale ≥4/5 Blue wool scale >6	
MIRROR EFFECT	TSE K 479	Observation		min. 6	
GLOSS (60°)	EN 13722	Gloss Unit (GU)		70	
COLOR DIFFERENCE (BY REFERANCE SAMPLE)	EN 13721	ΔE (L, a, b)		<1	
RESISTANCE TO COLD LIQUIDS	EN 12720+A1	Class		min. 3 (16 h)	
	EN 12721	Rating	Pet		4
SURFACE RESISTANCE TO WET TEMPERATURE (70 °C)	EN 12721		Pvc&Pvc +Pet		5
FORMALDEHYDE RELEASE	EN ISO 12460-3	mg/m² air		E0 < 1,75, E1 \leq 3,5 E2 ; 3,5 < release \leq 8	

It is prepared with reference to TSEK 517 Standard.

Some criteria and tolerances required for competence are specific to Kastamonu Entegre, and the right to evaluate and change is reserved to those authorized by Kastamonu Entegre.

ADVANTAGES OF EVOGLOSS

Modern glossy and matte patterns leading the trends, adding deepness to your living spaces with high gloss, stylish looking and mirror-effect glossy surfaces, bringing naturalness to your living spaces with matte surfaces, preserving the first day appearance for many years due to high resistance to fading characteristics, being easy to clean as well as having no loss of brightness on the surfaces due to cleaning.



EVOGLOSS ADVANTAGES



HIGH GLOSS (GLOSSY)



MIRROR EFFECT (GLOSSY)



SOFT TOUCH (MATTE)



RESISTANT TO SCRATCHING



EASY CLEAN



RESISTANT TO STAIN



RESISTANT TO CRACKING



LOW MICRO SCRATCHES

"Add Color to Life"



26 UNI DECORS



The colors may vary on digital media. Please check with original sample.

P105 DAMSON

P107 MERLO

P012 SOFT TOUCH BLUE

P013 SOFT TOUCH LIGHT GREY




TURQUOISE

Turquoise is the color of enthusiasm and passion which nature creates in people. The inspiration we receive from nature reflects the vitality of the turquoise to your living AREAS. It adds sparkle to every place with its bright and vivid color.

P114 **TURQOISE**





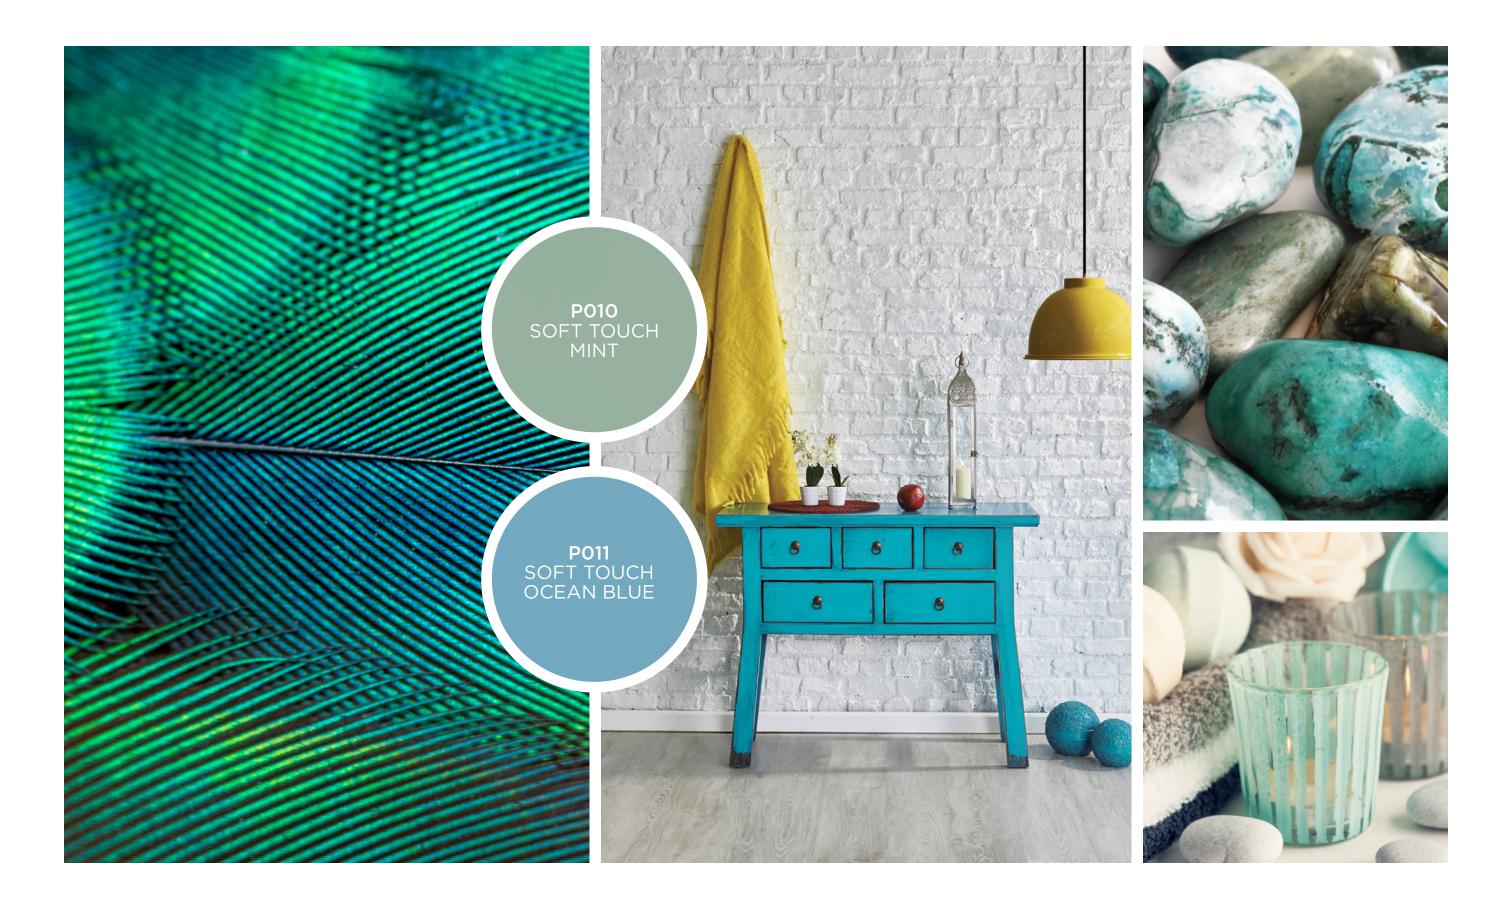











9 WOOD DECORS



The colors may vary on digital media. Please check with original sample.

BYANN BKOXO

Bamboo brings the natural appearance of wood to the living AREAS in a warm breeze. The visual richness it offers comes from the robustness of the bamboo plant and its very practical structure. With its melodious and decorative structure, it can be used with plain colors to create harmonious combinations.

P315 BAMBOO














FANTAS DECORS



32 FANTASY DECORS

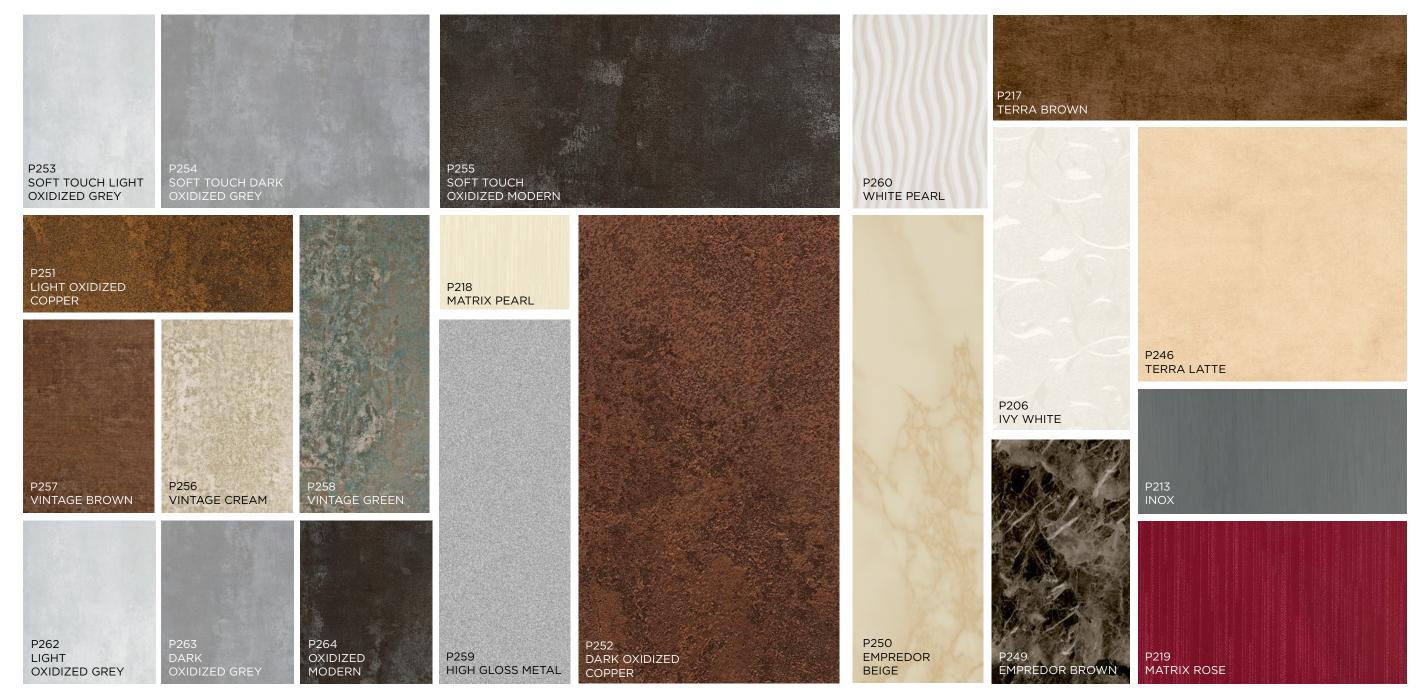

The colors may vary on digital media. Please check with original sample.

32 FANTASY DECORS

P265 BRUSH BRONZE		P209 GALAXY CREAM	
P266 DARK INOX	P210 GALAXY GOLD		231 ALAXY BLACK
		P230 DARK HONEY MIST	
P208 GALAXY WHITE	P267 BRONZE INOX	P268 BRUSH GOLD	

The colors may vary on digital media. Please check with original sample.



P254 SOFT TOUCH DARK OXIDIZED GREY


P263 DARK OXIDIZED GREY





Oxide is a new substance formed by the Oxygen the binding with another element. We can call our oxide decorations the spacious oxygen of living AREAS. It has an innovative and pretty assertive look. **An unrestrainable energy, an extraordinary style. Therefore, an ideal option for those looking for innovation.**

P255 SOFT TOUCH OXIDIZED MODERN

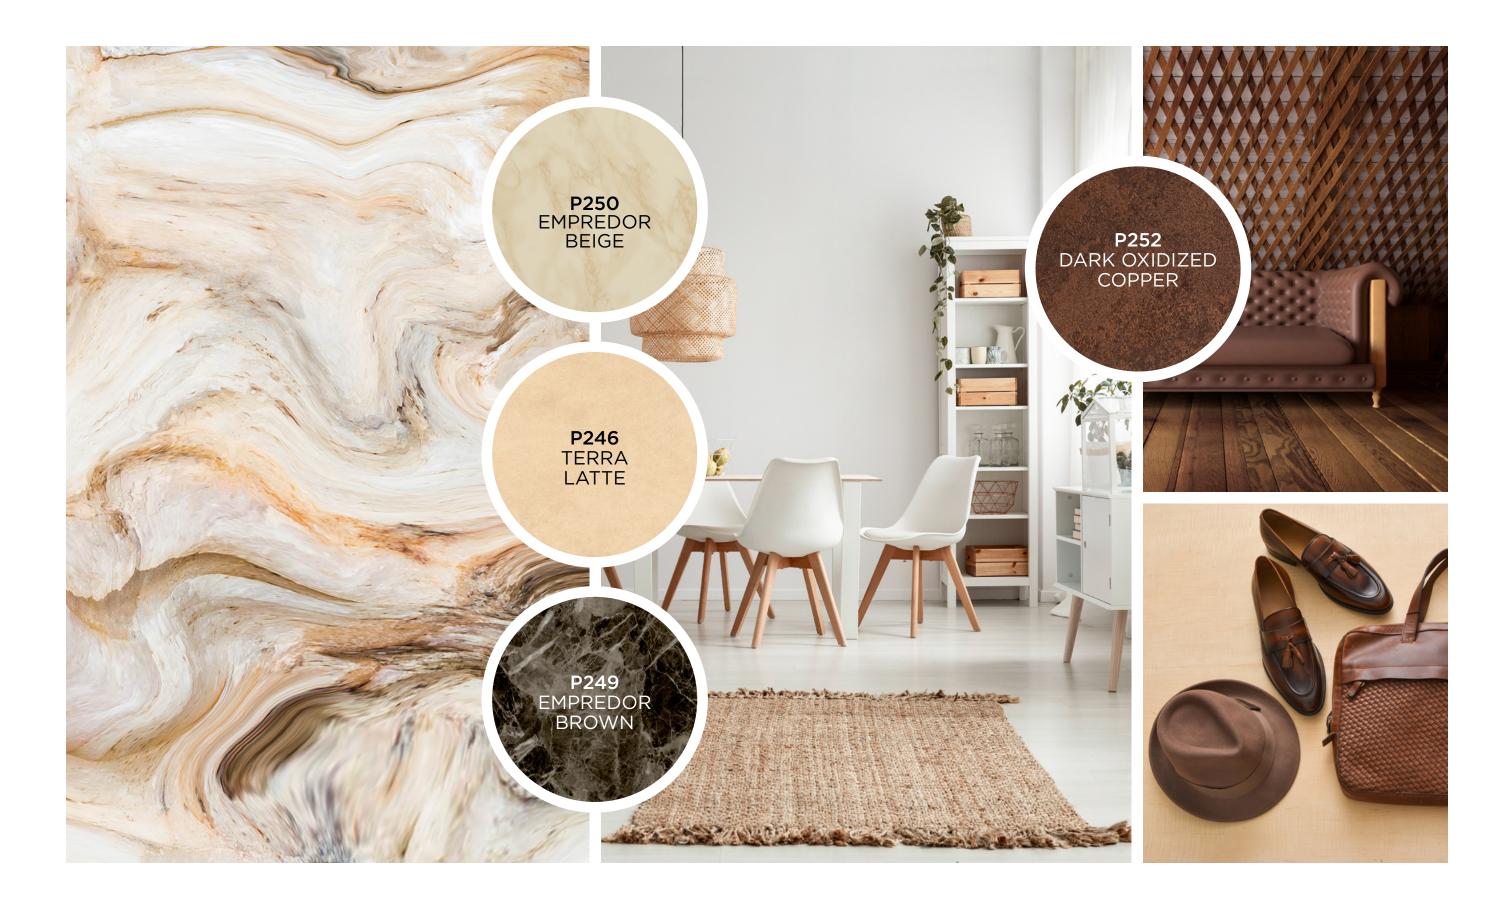



P257 VINTAGE BROWN



P265 BRUSH BRONZE





Behind its glittering and stylish appearance is a great technology. While it adds elegance and aesthetics to furniture with its natural look, the shimmering look in its details makes it privileged. It welcomes you to a sparkling world.

















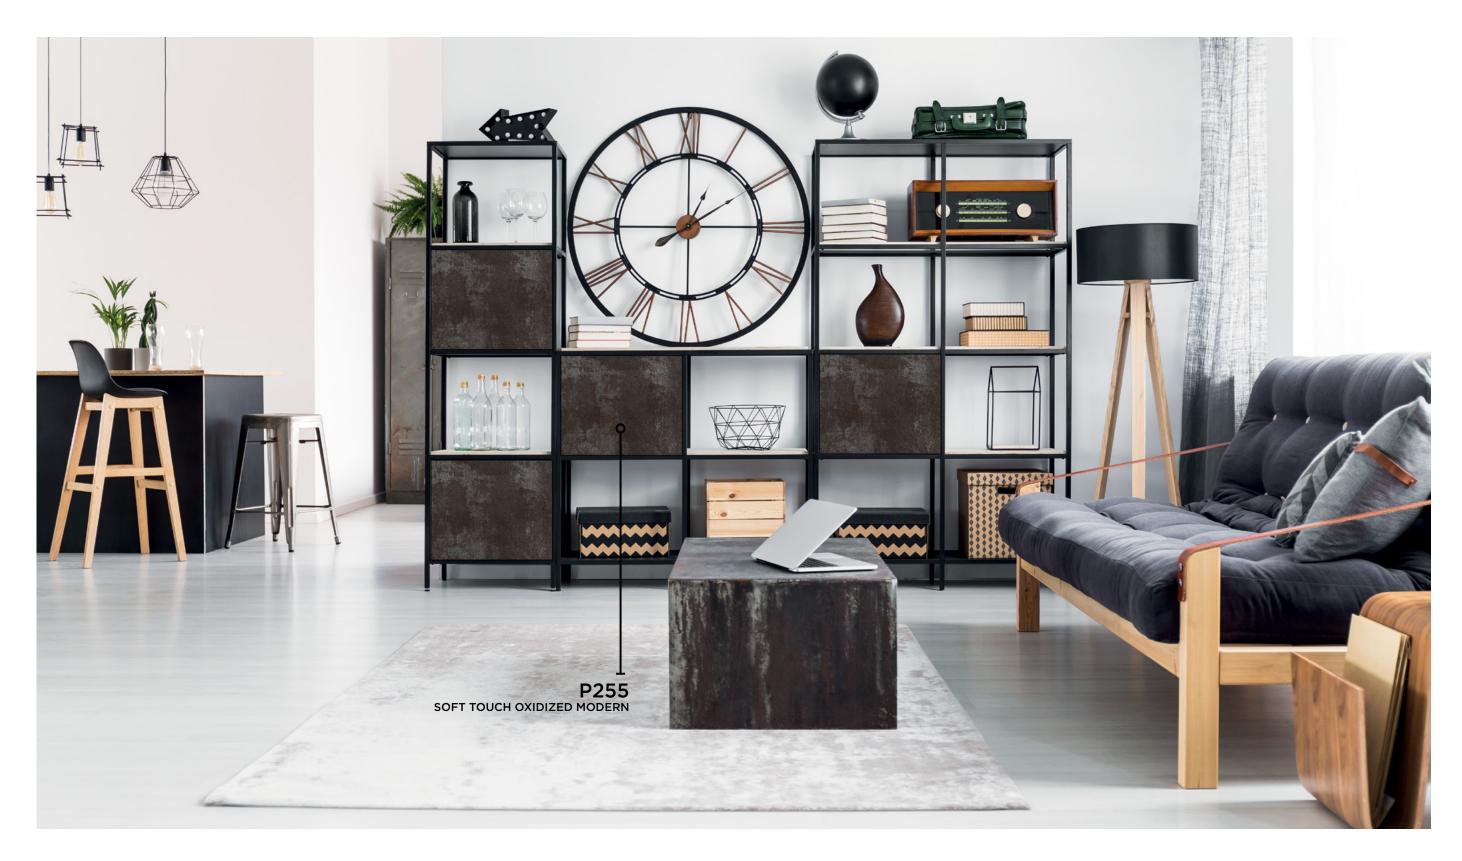







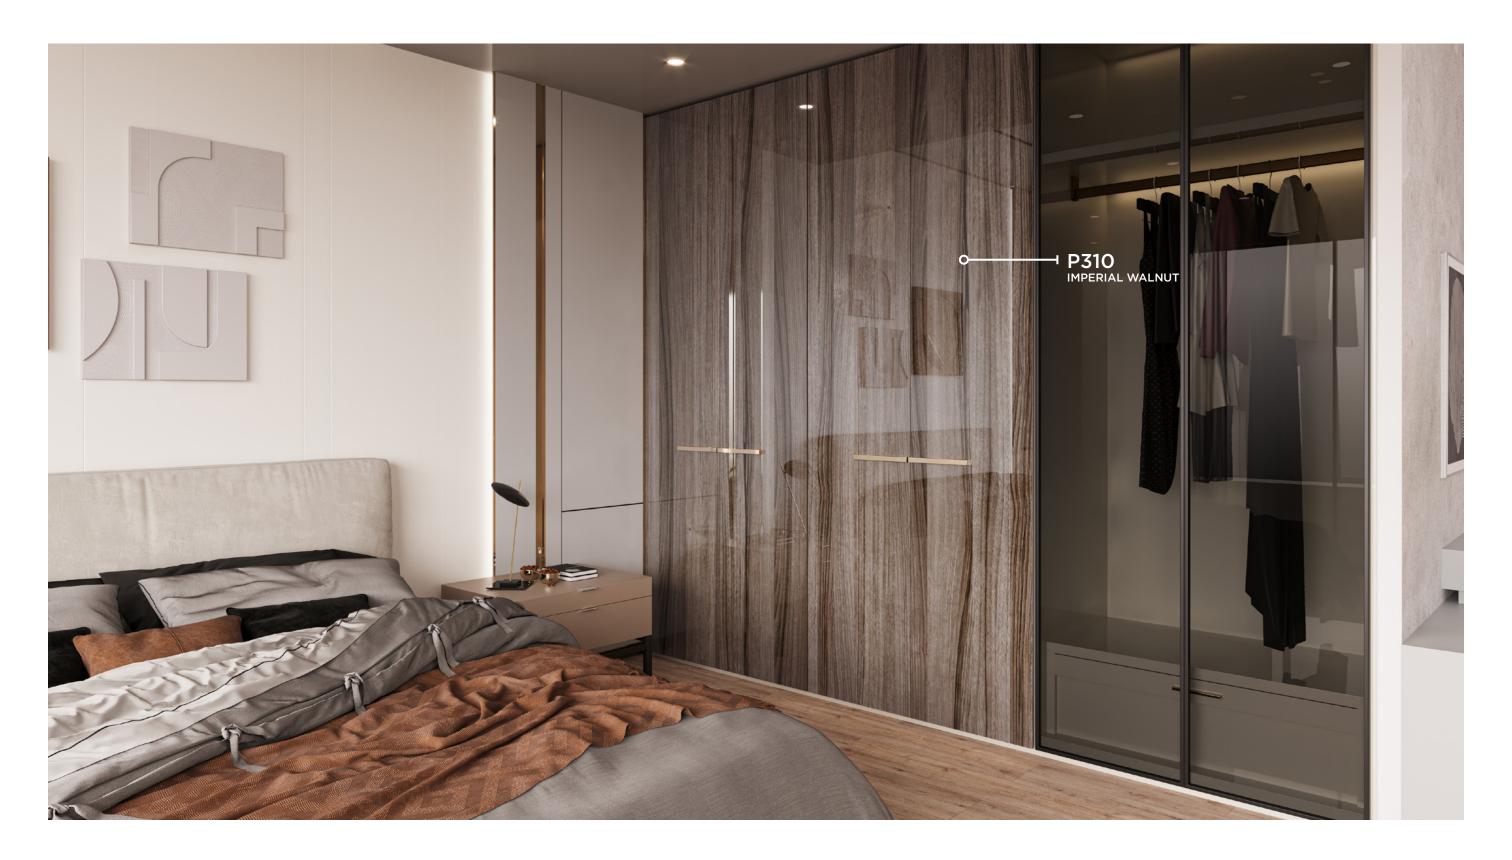



EVOGLOSS

USAGE AND STORAGE INSTRUCTION FOR OUR EVOGLOSS PRODUCTS

Since our products are suitable for indoor use, they should not be exposed to direct sunlight and should not be used in open areas where the ambient conditions are changeable. Do not use chemicals such as alcohol, acid, thinner etc. during the cleaning of our products. Soapy water will be sufficient for cleaning.

Remove the surface protection stretch only after the final installation.

Products must be protected from direct contact with heating and cooling equipment. Avoid rubbing our products with abrasive, hard and dry cleaning cloths. it would be more appropriate to use moist cotton cloths instead. Our products must be stored at room temperature, away from dust and contamination. In case of damages and defects which are not caused by a production fault, which may occur during the transportation and relocation not complying with the instructions for usage and storage or after the delivery, we, Kastamonu Ağaç San. Ve Tic. A.Ş., will not have any responsibility under the scope of warranty.





The mark of responsible forestry

bridging nature and life

www.keas.com.tr



